## Clinton County Building Department 111 S. Nelson Ave. Wilmington OH 45177 937.382.3335

RECOMENDED STRUCTURE AND ARRANGEMENT OF SERVICE EQUIPMENT


2" x 4" BRACE
WITHOUT SPLICE

2" x 4" BRACE
WITHOUT SPLICE

75' MAX. DISTANCE
OF SERVICE SUPPORT
FROM COMPANY
SUPPLY POLE

WIRE HOLDER AND
METER EASE FURNISHED
BY COMPANY AND
INSTALLED BY
CUSTOMER.

CONNECTORS AND
SERVICE DROP
INSTALLED BY
COMPANY

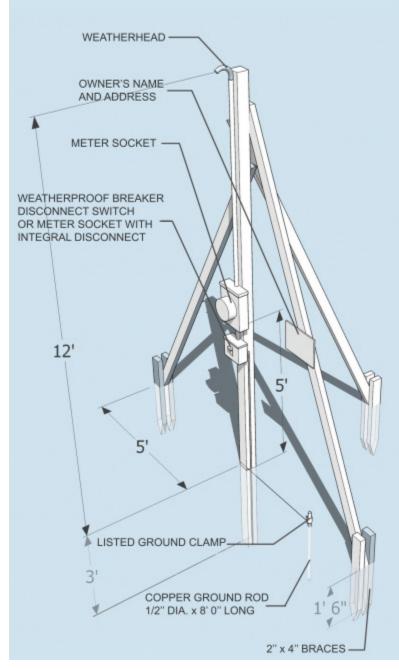

## **GENERAL NOTES:**

SERVICE DROPS UP TO 40': (1) 4" x 4" OR (2) 2" x 4" TIMBERS SPIKED TOGETHER.

SERVICE DROPS GREATER THAN 40' UP TO 75': (2) 2" x 6" TIMBERS SPIKED TOGETHER.

THIS INSTALLATION IS RECOMMENDED FOR ALL TEMPORARY 120/240V - 1 SERVICES, 200 AMPS OR SMALLER.

TIMBER SIZES SHOWN FOR SERVICE SUPPORT ARE MINIMUM FOR STRENGTH REQUIRED.

CUSTOMER TO INSTALL ALL MATERIALS INCLUDING SERVICE SUPPORT, SERVICE DISCONNECT(S), SERVICE GROUND (590) CONSTRUCTION SITES.

ALL 120 VOLT SINGLE PHASE 15 AND 20 AMPERE RECEPTACLE OUTLETS WHICH ARE NOT A PART OF THE PERMANENT WIRING OF THE BUILDING OR STRUCTURE, SHALL HAVE GROUND FAULT CIRCUIT INTERRUPTERS FOR PERSONNEL PROTECTION.

## RECOMMENDED TEMPORARY CONSTRUCTION POLE (UNDERGROUND)

